


SDB SLITTER / REWINDER

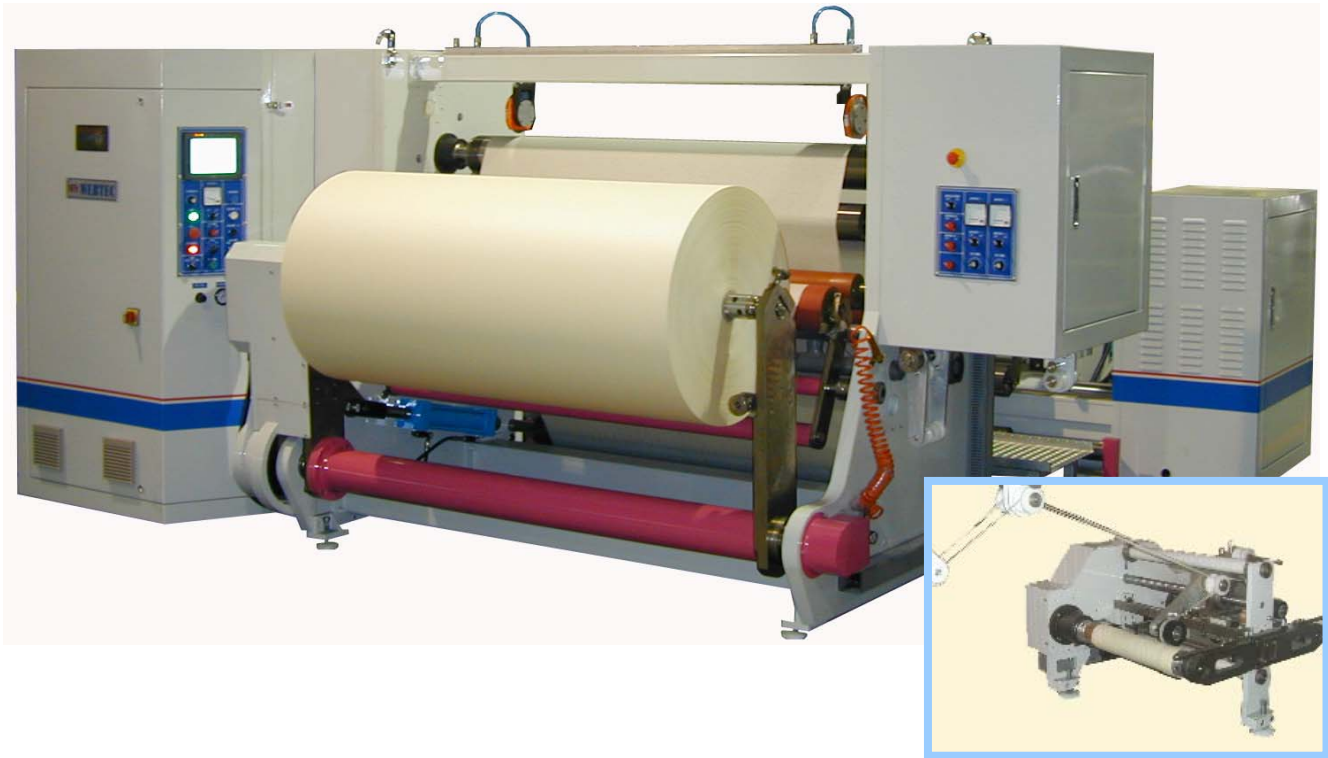

Trimming unit (Optional)

Application : Single shaft center-surface type winding, suitable for slitting various label stocks and papers.

Specifications :	Machine Width :	1.3M/1.6M	Max. Unwind O.D :	1.0M/1.2M/1.5M
	Paper Core I.D :	3" / 6"	Min. Slitting Width :	500mm (as per rewind O.D)
	Max. Rewind O.D :	1.0M/1.2M/1.5M	Machine Speed :	300 & 500 M /Min

Features:

1. Equipped with separated shaftless type unwind base, automatic web guide and automatic tension control system.
2. Slitting by shear cutter, which is designed for various materials converting. Trim unit is a strong blower type for waste collections.
3. Driven by 2 connective A.C motors; one for web feeding, one for rewind tension control, in which the torque increased automatically on the rewind shaft as the finished roll O.D grows bigger.
4. Center-surface type winding is able to rewind various materials on different requests. Rewind arm is automatic movable type for flawless rewinding.

Optional Parts:

1. Trim removable unit : Traverse type winding by servo motor control, which collects waste materials much efficiently.



佳源工業股份有限公司
WEBTEC INDUSTRIES CO., LTD.

TEL:886-2-22992289 FAX:886-2-22991055
WEBSITE: www.webtec-hy.com

新北市五股區新北產業園區五權路 51 號

NO. 51, WU CHUAN ROAD, NEW TAIPEI INDUSTRIAL PARK,
WU KU DISTRICT, NEW TAIPEI CITY, TAIWAN, R.O.C.
E-MAIL: webtec@ms46.hinet.net